







# FA 60 027 XX



FA 60 027 10

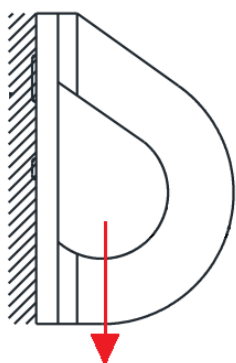

FA 60 027 12

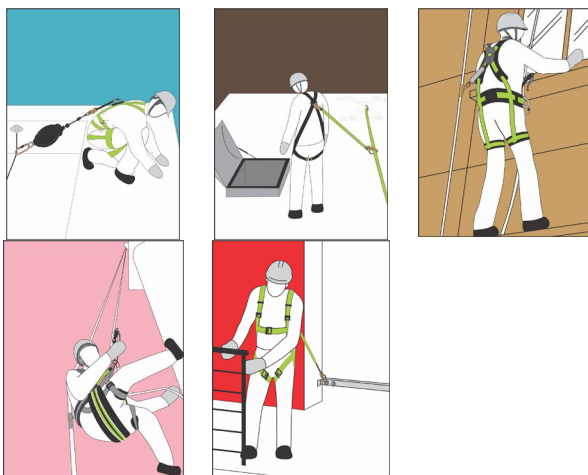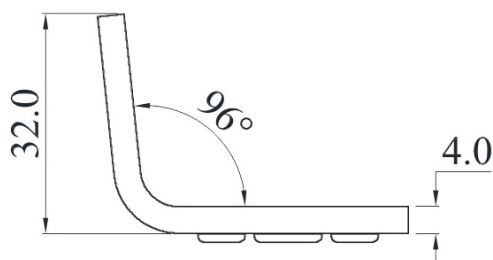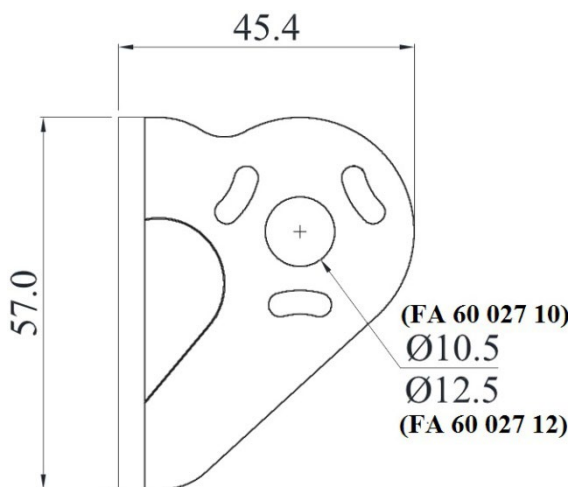

<b>HS CODE</b>
73160010
<b>CARTON SIZE / PCS.</b>
40 x 30 x 24 cm / 100
Certificate of Test n° SPC0240576 / 1548 Extension 1
<b>Satra Technology Centre, N°0321</b> Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
<b>MODULE D F14/14003.02</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland


REF.	FA 60 027 10	FA 60 027 12
CE	EN 795:2012 Type A	
	x1	
MAT.		
R (kN) / MBS (kN)	12 kN / 23 kN	
	M10 ---	M12 ---
	0.06 KG	0.06 KG



R (kN) / MBS (kN)

**Nombre d'utilisateurs**  
Number of users  
**Cantidad de usuarios**  
Quantità di utilizzatori  
**Anzahl der Benutzer**

**Résistance statique (en kN) / Résistance à la rupture**  
Static strength / Minimum Breaking Strength  
**Resistencia estática (en kN) / Resistencia a la ruptura (en kN)**  
Resistenza statica (in kN) / Resistenza alla rottura (in kN)  
**Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)**



**Fixations à utiliser / Dimensions de la structure d'accueil**  
Fasteners to use / Dimensions of the receiving structure  
**Fijaciones que deben usarse / Dimensiones de la estructura receptora**  
Elementi di fissaggio da utilizzare / Dimensioni della struttura ospitante  
**Zu verwendende Befestigungen / Abmessungen der Aufnahmestruktur**